


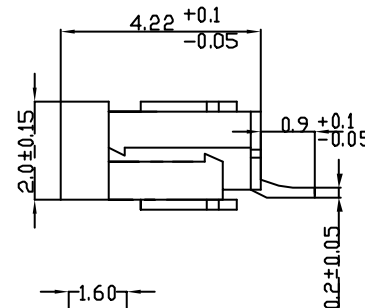
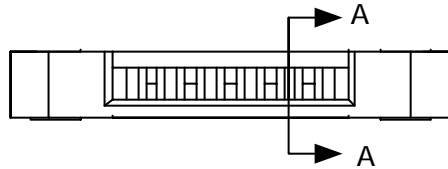
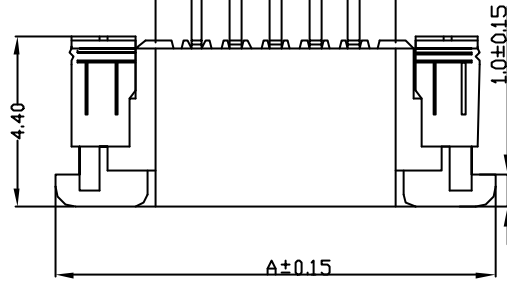
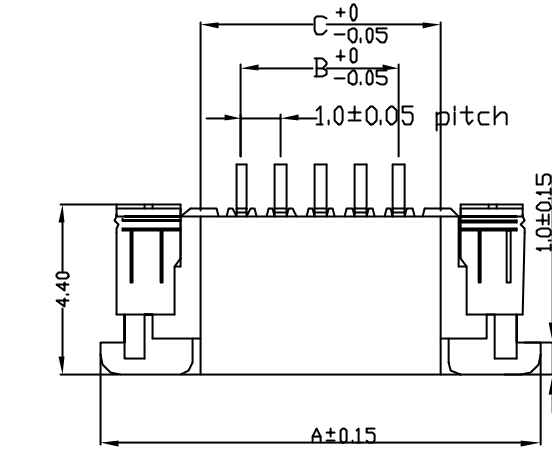


DIMENSIONS(mm)

CKT.	Catalog Number	A	B	C
02	FC501-02	8.40	2.00	3.10
03	FC501-03	9.40	3.00	4.10
04	FC501-04	10.40	4.00	5.10
05	FC501-05	11.40	5.00	6.10
06	FC501-06	12.40	6.00	7.10
07	FC501-07	13.40	7.00	8.10
08	FC501-08	14.40	8.00	9.10
09	FC501-09	15.40	9.00	10.10
10	FC501-10	16.40	10.00	11.10
11	FC501-11	17.40	11.00	12.10
12	FC501-12	18.40	12.00	13.10
13	FC501-13	19.40	13.00	14.10
14	FC501-14	20.40	14.00	15.10
15	FC501-15	21.40	15.00	16.10
16	FC501-16	22.40	16.00	17.10
17	FC501-17	23.40	17.00	18.10
18	FC501-18	24.40	18.00	19.10
19	FC501-19	25.40	19.00	20.10
20	FC501-20	26.40	20.00	21.10
21	FC501-21	27.40	21.00	22.10
22	FC501-22	28.40	22.00	23.10
23	FC501-23	29.40	23.00	24.10
24	FC501-24	30.40	24.00	25.10
25	FC501-25	31.40	25.00	26.10
26	FC501-26	32.40	26.00	27.10
27	FC501-27	33.40	27.00	28.10
28	FC501-28	34.40	28.00	29.10
29	FC501-29	35.40	29.00	30.10

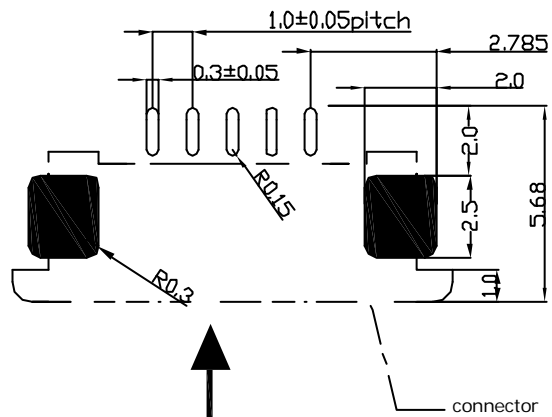

SECTION A-A

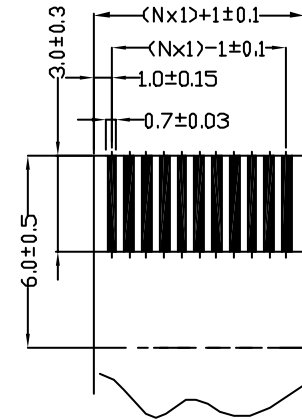

FPC/FFC INSERT DIRECTION

PCB Layout

更改 REV	設變內容 MODIFICATION	日期 DATE	修改 DRAW

NOTE:

- 1.MATERIAL:
HOUSING: NYLON UL 94V-0
CONTACT: PHOSPHOR BRONZE
PLATING: TIN
TEMPERATURE: -20°C TO +85°C
- 2.SPECIFICATION:
SIZE: 4 TO 60 CIRCUITS
FOR 0.5mm THICK FFC/FPC.
VOLTAGE: 50V
CURRENT: 0.5A
CONTACT RESISTANCE: 20mΩ MAX.
DIELECTIC WITHSTANDING VOLTAGE: 500V AC

DIMENSION IN mm [inch]			 廣茂股份有限公司 COMMA ELECTRONIC INC.	
TOLERANCE UNLESS OTHERWISE SPECIFIED			名稱 TITLE 抽屜式上接觸 P=1.0mm	CUSTOMER DRAWING
.X±0.3	X'±1'	審核 APPROVE	案號 FILE NO. FPS1.0-11XX	圖號 DWG NO. FPS1.0-11XX
.XX±0.20	.X'±0.5'	核對 CHECK	圖紙 SIZE A4	角法 PROJ.
.XXX±0.100	.XX'±0.25'	製圖 DRAW	比例 SCALE 4:1	張數 SHEET 1 / 1
			更改 REV A	