
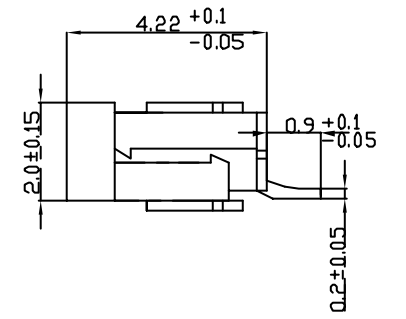
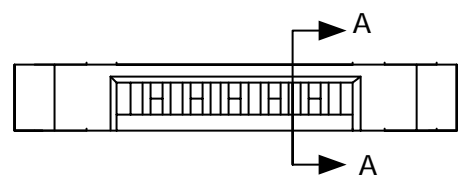


1 2 3 4 5 6 7 8

更改 REV	設 變 內 容 MODIFICATION	日 期 DATE	修 改 DRAW

DIMENSIONS(mm)

CKT.	Catalog Number	A	B	C
02	FC502-02	8.40	2.00	3.10
03	FC502-03	9.40	3.00	4.10
04	FC502-04	10.40	4.00	5.10
05	FC502-05	11.40	5.00	6.10
06	FC502-06	12.40	6.00	7.10
07	FC502-07	13.40	7.00	8.10
08	FC502-08	14.40	8.00	9.10
09	FC502-09	15.40	9.00	10.10
10	FC502-10	16.40	10.00	11.10
11	FC502-11	17.40	11.00	12.10
12	FC502-12	18.40	12.00	13.10
13	FC502-13	19.40	13.00	14.10
14	FC502-14	20.40	14.00	15.10
15	FC502-15	21.40	15.00	16.10
16	FC502-16	22.40	16.00	17.10
17	FC502-17	23.40	17.00	18.10
18	FC502-18	24.40	18.00	19.10
19	FC502-19	25.40	19.00	20.10
20	FC502-20	26.40	20.00	21.10
21	FC502-21	27.40	21.00	22.10
22	FC502-22	28.40	22.00	23.10
23	FC502-23	29.40	23.00	24.10
24	FC502-24	30.40	24.00	25.10
25	FC502-25	31.40	25.00	26.10
26	FC502-26	32.40	26.00	27.10
27	FC502-27	33.40	27.00	28.10
28	FC502-28	34.40	28.00	29.10
29	FC502-29	35.40	29.00	30.10


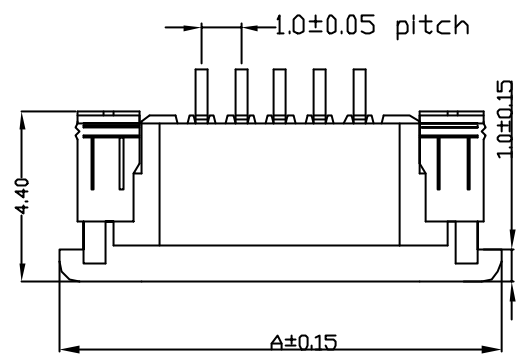


NOTE:

1.MATERIAL:
 HOUSING: NYLON UL 94V-0
 CONTACT: PHOSPHOR BRONZE
 PLATING: TIN
 TEMPERATURE: -20°C TO +85°C

2.SPECIFICATION:
 SIZE: 4 TO 60 CIRCUITS
 FOR 0.5mm THICK FFC/FPC.
 VOLTAGE: 50V
 CURRENT: 0.5A
 CONTACT RESISTANCE: 20m MAX.
 DIELECTIC WITHSTANDING VOLTAGE: 500V AC

PCB Layout

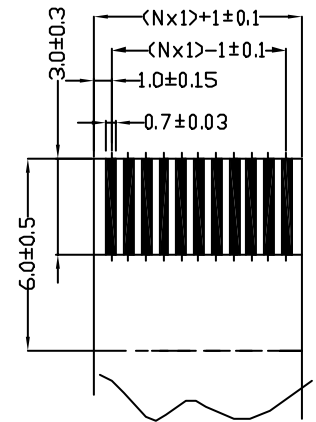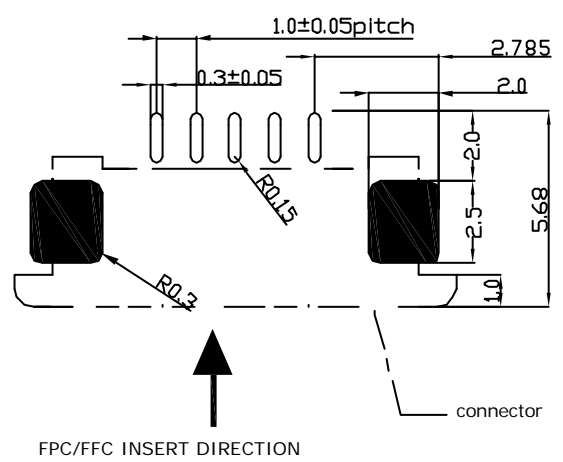

SECTION A-A DIMENSION IN mm [inch]			 廣茂股份有限公司 CUSTOMER DRAWING	
TOLERANCE UNLESS OTHERWISE SPECIFIED			名稱 TITLE 抽屜式下接觸 P=1.0mm	圖 號 DWG NO. FPS1.0-21XX
.X±0.3	X'± 1'	審核 APPROVE	案 號 FILE NO. FPS1.0-21XX	圖紙 SIZE A4
.XX±0.20	.X'± 0.5'	核對 CHECK	圖法 PROJ.	角法 SCALE 4:1
.XXX±0.100	.XX'± 0.25'	製圖 DRAW	張數 SHEET 1 / 1	更改 REV A

1 2 3 4 5 6 7 8

F
E
D
C
B
A

F
E
D
C
B
A