


REV	設變內容 MODIFICATION	日期 DATE	修改 DRAW

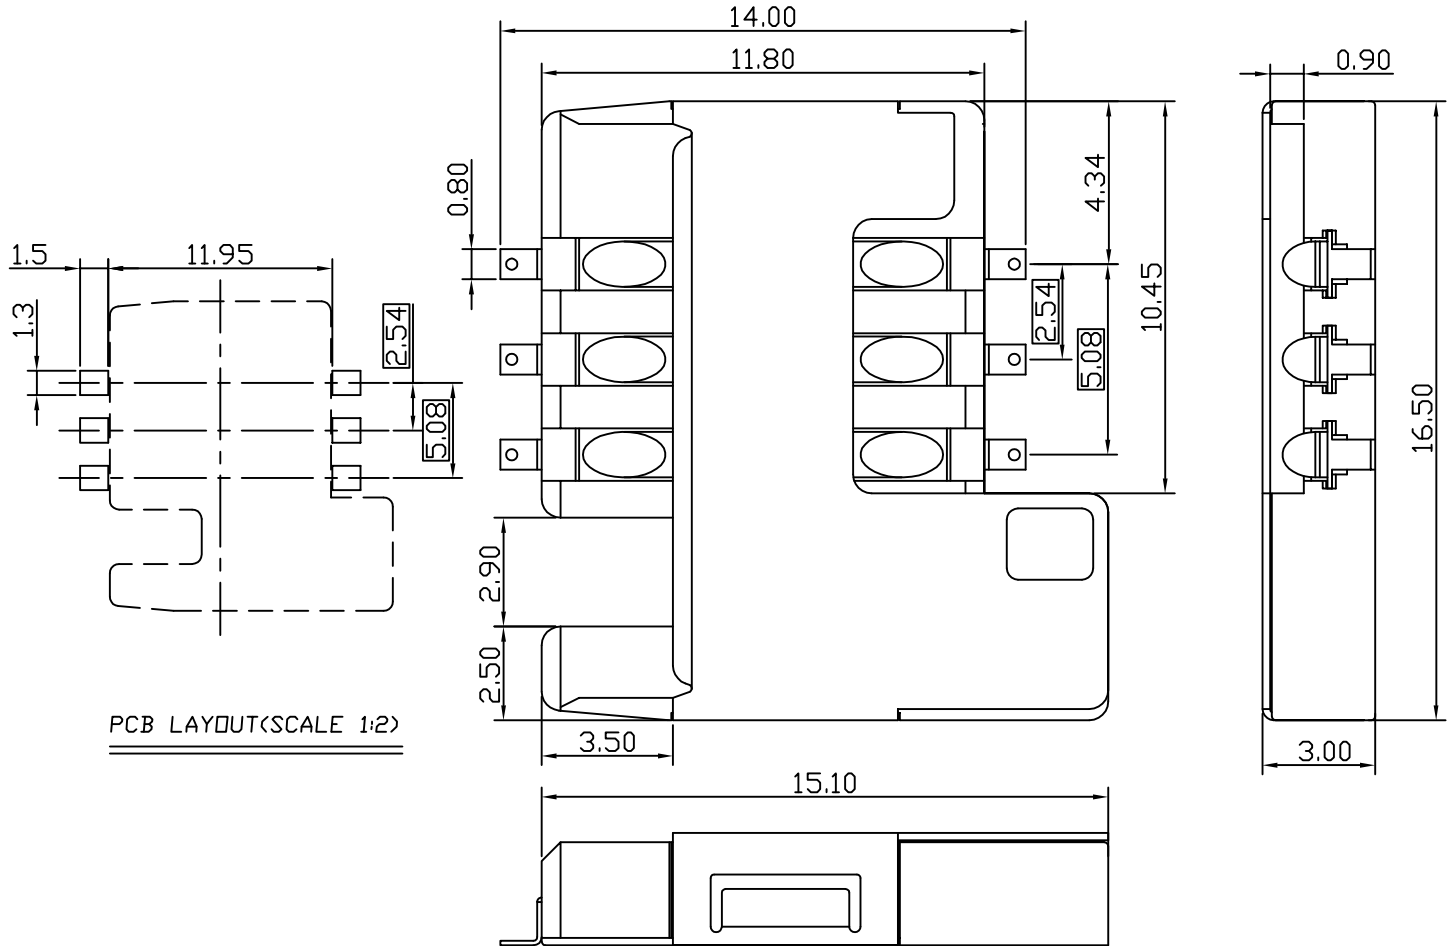

INSULATOR: LCP
CONTACT: COPPER ALLOY
PLATED: SELECTED 30u" GOLD OVER NICKEL

MATING FORCE: 80 GRAM MIN.
150 GRAM MAX.

INSULATION RESISTANCE: 1000M ohms min
CONTACT RESISTANCE: 100M ohms max
DIELECTRIC STRENGTH: 500Vrms min
SWITCHING CURRENT: 1A max
OPERATING TEMPERATURE: -40 C ~ +85 C
MECHANICAL LIFE 10,000 CYCLES.

DIMENSION IN mm [Inch]		產品規範 PROD. SPEC.	C	康茂股份有限公司 COMMA ELECTRONIC INC.
TOLERANCE UNLESS OTHERWISE SPECIFIED		包裝規範 PKG. SPEC.		
.X±0.3	X'±1"	審核 APPROVE	案號 FILE NO.	圖號 DWG NO.
.XX±0.20	.X'±0.5"	核對 CHECK	SCS2.54-4106	SCS2.54-4106
.XXX±0.100	.XX'±0.25"	製圖 DRAW	圖紙 SIZE	角法 PROJ.
			A4	張數 SHEET
				1 / 1
			比例 SCALE	更改 REV
			1:1	A